


CONCESSIONS (NORTH) ELEVATION
1/4" = 1'-0"

ELEVATION NOTES LEGEND - COORDINATE WITH PLAN LOCATIONS

- ① GLASS BLOCK - 8" x 8" x 16" GLASS BLOCK, STYLE TO MATCH: NUBIO GOLD - SUBMIT SAMPLES FOR ARCHITECT'S APPROVAL.
- ② ACCENT BAND - 8" x 8" x 16" SPLIT FACED BLOCK - COLOR TO MATCH: NUTMEG - SUBMIT SAMPLES FOR ARCHITECT'S APPROVAL.
- ③ FIELD BLOCK - 8" x 8" x 16" SPLIT FACED BLOCK - COLOR TO MATCH: HARVEST. - SUBMIT SAMPLES FOR ARCHITECT'S APPROVAL.
- ④ MANUFACTURED STONE MOUNTED TO MASONRY BACK-UP (SEE BUILDING SECTIONS) - STONE TO MATCH LEDGESTONE SERIES, COLOR: MERLOT. - SUBMIT SAMPLES FOR ARCHITECT'S APPROVAL.
- ⑤ LIMESTONE SILL - 5 1/4" x 2" CONTINUOUS - CAST STONE ALTERNATES MAY BE ACCEPTABLE. -SUBMIT SAMPLES TO ARCHITECT FOR APPROVAL.
- ⑥ FIELD BLOCK (NEAR POOLSIDE) - SPLIT FACED CMU - 8" x 8" x 16" - COLOR TO MATCH: OYSTER BAY -SUBMIT SAMPLES TO ARCHITECT FOR APPROVAL.
- ⑦ FIELD BLOCK (AT HIGH BAY AREA) - SMOOTH FACED CMU - 8" x 8" x 16" - COLOR TO MATCH: HARVEST - SUBMIT SAMPLES TO ARCHITECT FOR APPROVAL.
- ⑧ FRAMED DECORATIVE SCREENS - ALUMINUM MESH SCREEN MATERIAL TO MATCH - ITEM # 1780006331, .063 GAUGE, PATTERN: AIRLINE, BY MCNICHOLS. 2" FRAME TO MATCH BERRIDGE COLOR: ROYAL BLUE. - SUBMIT SAMPLES TO ARCHITECT FOR APPROVAL.
- ⑨ CLERESTORY CUPOLA FINISH - HARDI PLANK SIDING TO MATCH: FINISH: SMOOTH, COLOR: KHAKI BROWN, SIZE: 6" - SUBMIT SAMPLES TO ARCHITECT FOR APPROVAL.
- ⑩ ALUMINUM STANDING SEAM ROOF WITH ALUMINUM WRAPPED EAVES AND SOFFIT. - Z-LOCK SYSTEM BY BERRIDGE OR APPROVED EQUAL, COLOR: ROYAL BLUE, SEAM SPACING: 1 1" -SUBMIT SAMPLES TO ARCHITECT FOR APPROVAL.
- ⑪ PAINTED COLUMN - ALL EXPOSED METAL COLUMNS AND BEAMS TO BE PAINTED TO MATCH BERRIDGE COLOR: ROYAL BLUE (SEE ROOF COLOR SPEC.) - ENAMEL PAINT, SUBMIT PAINT SPECIFICATION AND WET SAMPLES FOR ARCHITECT'S APPROVAL.
- ⑫ FRESH AIR GRILLES - 10"D. x 8"H. x 16"L. CAST IRON LOUVERED GRILLES TO MATCH 10" BLOCK CMU UNITS. LOUVERS TO BE PAINTED TO MATCH COLOR _____, BAKED ENAMEL PAINT. -SUBMIT PAINT SPEC. AND COLOR SAMPLES TO ARCHITECT FOR APPROVAL.
- ⑬ EXISTING BLOCK TO REMAIN. BLOCK TO RECEIVE POPCORN TEXTURE FINISH AND BE REPAINTED. COLOR TO MATCH NEW TEXTURED BLOCK, COLOR: OYSTER BAY. -SUBMIT PAINT SPEC. AND COLOR SAMPLES TO ARCHITECT FOR APPROVAL.
- ⑭ ADDITIONAL CMU - NEW CMU ADDED TO EXISTING CMU WALLS. SEE STRUCTURAL DRAWINGS FOR ADDITIONAL INFO. NEW CMU: 8" x 8" x 16" SMOOTH FACED CMU (NO COLOR) - SEE ITEM #13 FOR FINISH. - SUBMIT PAINT SPEC. AND COLOR SAMPLES TO ARCHITECT FOR APPROVAL.
- ⑮ EXISTING CMU - EXISTING BAND COURSE BLOCK TO RECEIVE POPCORN TEXTURE FINISH AND BE REPAINTED. COLOR TO MATCH NEW TEXTURED BLOCK BAND, COLOR: NUTMEG. - SUBMIT PAINT SPEC. AND COLOR SAMPLES TO ARCHITECT FOR APPROVAL.
- ⑯ NEW SIGNAGE - STEM MOUNTED SIGNAGE TO REPRESENT HIDDEN VALLEY'S LOGO. - SUBMIT SIGNAGE SPEC., DESIGN AND COLOR SAMPLES TO ARCHITECT FOR APPROVAL.
- ⑰ WRAPPED STRUCTURE - ALL STRUCTURAL CEILING MATERIAL AT THE EXTERIOR SHALL BE WRAPPED IN VINYL SOFFIT. ALUMINUM METAL SHALL BE USED TO WRAP THE EXPOSED STEEL BEAMS AND HARDI-PLANK MATERIAL SHALL BE USED AT FACE OF SOFFIT.

NOTE: SEE A-3.1 AND SECTION DRAWINGS FOR ELEVATION HEIGHTS.

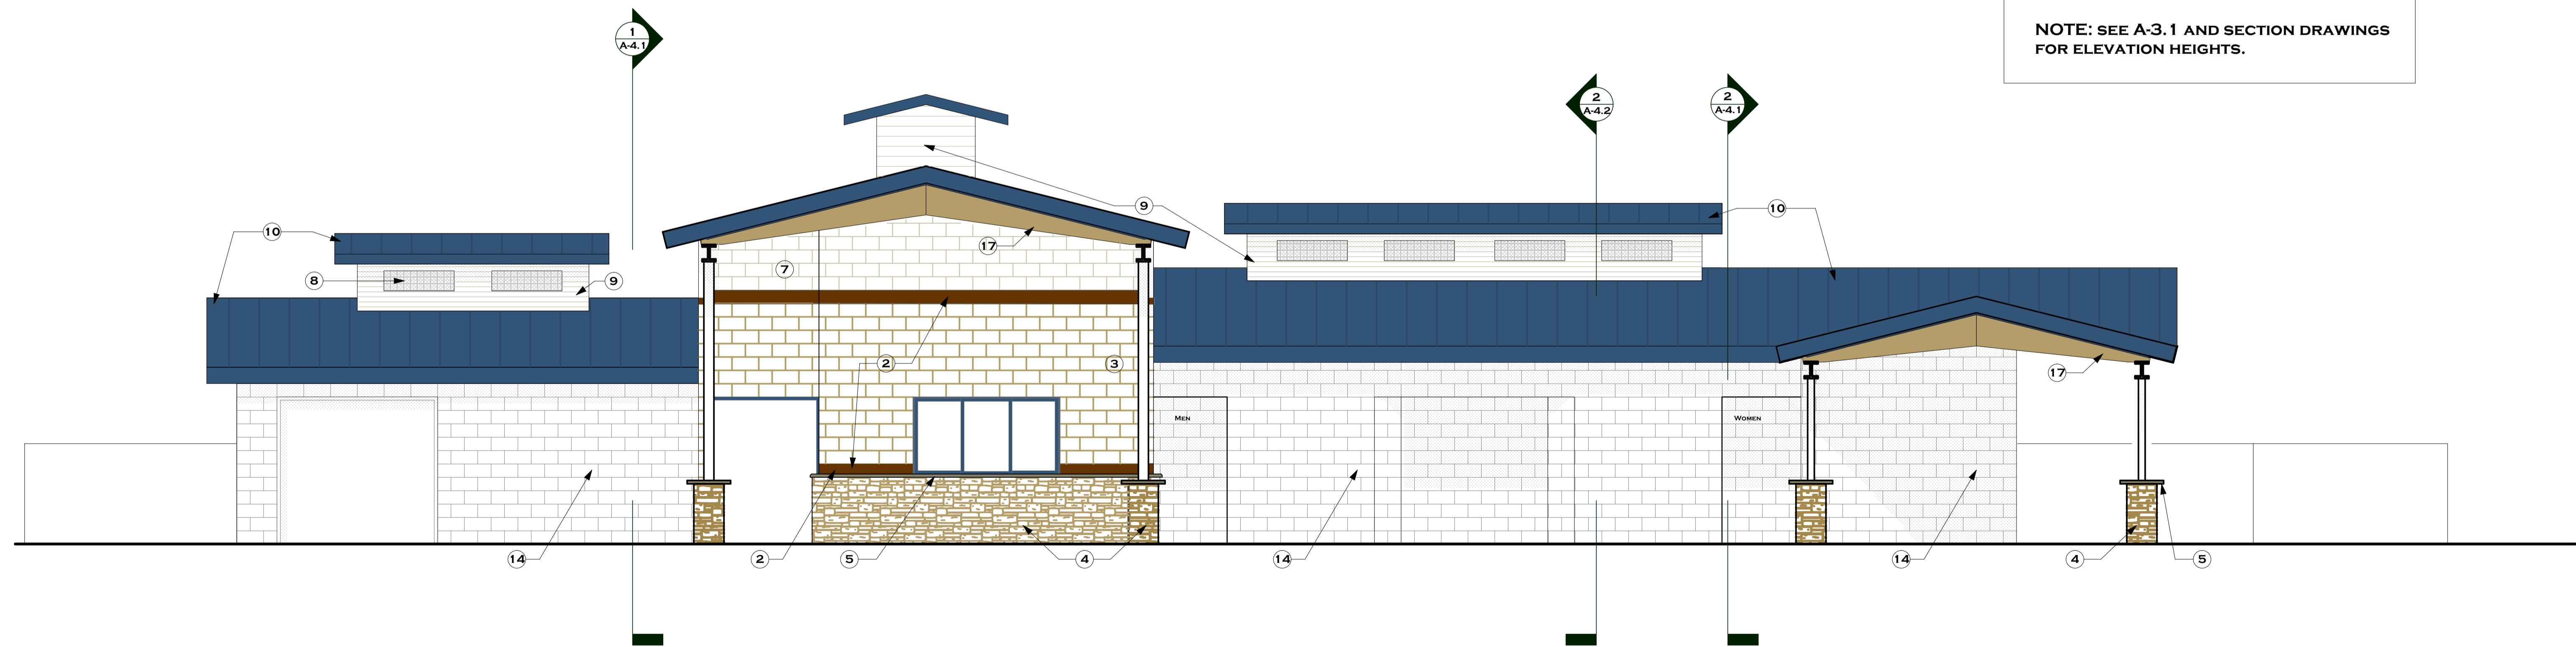

POOLSIDE (EAST) ELEVATION
1/4" = 1'-0"

Owner:
Hidden Valley lake POA
19303 Schmar Drive
Lawrenceburg, IN 47025

ALLIED ARCHITECTURE
JADE RITTER, R.A.
129 N. MAIN STREET
BATESVILLE, IN 47006
812-934-6678
JRITTER@ALLIEDARCHITECT.COM

Revisions:

HIDDEN VALLEY LAKE - POOL HOUSE
HIDDEN VALLEY LAKE POOL
20698 LAKEVIEW DRIVE
LAWRENCEBURG, INDIANA 47025

Date:
09-14-11

Title:
BUILDING ELEVATIONS

A-3.2